

## Summary

### Performance test

Report number: TNO 2018 R11178

Bakemastraat 97K  
Postbus 49  
2600 AA Delft  
The Netherlands

**STOFVRIJWERKEN.TNO.NL**

Tel. +31 888 663090

*The TNO quality system is ISO 9001  
certified.*

# Husqvarna S26 dust extractor in combination with 125 mm angle grinder and TNO/DUSTTOOL dust shroud

#### *Commissioned by*

Husqvarna Nederland BV  
Jool Hulstraat 20-22  
Postbus 50131  
1305 AC Almere

All rights reserved.

No part of this publication may be reproduced, stored in a database or retrieval system or published in any form, electronic, mechanical, by print, photoprint, microfilm or any other means, without the prior written permission of TNO.

If this is a commissioned report, the respective rights and obligations of the commissioning body and the contractor are set out in the General Terms and Conditions for Commissions to TNO and in the specific written agreements entered into by the parties. Inspection of this report by parties with a direct interest therein is permitted.

In recent years, TNO has focused intensively upon innovative improvements to tools, processes and workplace design in the industrial environment. The main purpose of these efforts is to create low-dust production processes and tools. As well as construction, our product and process development activities have targeted the metal, aircraft and wood industries, working closely with industry organizations, trades unions, governments, employers, employees and manufacturers.

To describe innovative production processes and tools, and to assess their practical functionality, we have developed the TNO Performance Test. This checks that relevant statutory and in-house occupational exposure limits (OELs) for hazardous substances such as crystalline silica, hardwood dust and hexavalent chromium are not exceeded in areas where they may be inhaled by workers in the course of their everyday duties.

**Inspectie SZW, the Dutch labour inspectorate, explicitly endorses the TNO Performance Test in its “Basic Inspection Module for Crystalline Silica” (Basisinspectiemodule Kwartsstof). That document states, “If you decide to conduct your working activities using the measures contained in a TNO Performance Test, as described on the TNO website (stofvrijwerken.tno.nl), I [the inspector] will regard exposure as being adequately managed”.**

This means that an employer using the test is able to communicate unambiguously with the inspectors and that no additional exposure measurements need to be agreed. Moreover, it provides both the employer and its personnel with an objective measuring tool for the accurate assessment of proposed investments. Innovative manufacturers and suppliers of production processes and tools can also highlight their quality by complying with the test criteria.

#### **Assessment criteria**

The TNO Performance Test assesses exposure to hazardous substances in the “employee inhalation zone” in the workplace. The applicable norms for each substance, both statutory and in-house, are those contained in the database of Occupational Exposure Limits (Grenswaarde Stoffen op de Werkplek, GSW) maintained by the Social and Economic Council of the Netherlands (see <http://www.ser.nl/nl/taken/adviserende/grenswaarden.aspx>).

#### **Project description**

For this project, TNO studied emissions of respirable crystalline silica (RCS) when grinding calcium silicate using an angle grinder fitted with a TNO/Dusttool dust shroud and connected to a Husqvarna S26 dust extractor.

#### **System specifications**

The tested system consisted of a Husqvarna S26 dust extractor (or equivalent\*) in combination with the TNO reference angle grinder, a 125 mm Metabo WE 9-125 Quick, fitted with a TNO/Dusttool dust shroud. This fits most common brands of angle grinders (Makita, Bosch, DeWalt, KGS, Hitachi, Flex, Fein).

A flexible hose (length 5.0 m, diameter 50 mm) connected the shroud to the extractor.

Figure 1 shows the complete system.

\* An “equivalent” dust extractor is one with specifications for capacity, dust collection, filter cleaning and recirculation which are the same as or better than those of the model tested.



*Husqvarna S26 dust extractor.*



*TNO reference 125 mm angle grinder, model Metabo WE 9-125 Quick, with TNO/Dusttool dust shroud.*

*Figure 1. The complete system.*

Table 1 lists the key technical specifications of the system tested and its equivalents.

Table 1. Technical specifications of Husqvarna dust extractors.

Specification	S26	S36
Motor effect (W)	2400	3600
Power supply (V)	230 (50/60 Hz AC)	230 (50/60 Hz AC)
Filter efficiency (%)	99.995 (H14)	99.995 (H14)
Maximum suction capacity <sup>1</sup> (m <sup>3</sup> /h)	400	600
Vacuum <sup>2</sup> (kPa)	22	22
Weight (kg)	47	63

Specification	T4000	T7500	T10000
Motor effect (W)	3000	5500	11000
Power supply (V)	400 (50/60 Hz AC)	400 (50/60 Hz AC)	400 (50/60 Hz AC)
Filter efficiency (%)	99.995 (H14)	99.995 (H14)	99.995 (H14)
Maximum suction capacity <sup>1</sup> (m <sup>3</sup> /h)	400	600	900
Vacuum <sup>2</sup> (kPa)	28	28	30
Weight (kg)	99	206	336

<sup>1</sup> At ventilator.

<sup>2</sup> At end of hose.

**TNO Performance Test**

Table 3 lists the key specific test conditions.

Table 3. "Worst case" test conditions.

Material: calcium silicate CVK L100/198 RCS content of material: 25%	Extractor system compartmentalization: "semi complete".
Process: 30 m per 30 minutes of grinding (480 m per eight-hour working day) Productivity: permanent operation. Operator exposure period: eight-hour working day.	Suction capacity (dust extractor with hose): 275 m <sup>3</sup> /h (initial measurement) tot 245 m <sup>3</sup> /h (final measurement)
Groove breadth: 2 mm. Groove depth: 21-26 mm.	Filter efficiency: 99.995% (H14) Dust extractor cleaning: manual.
Direction of dust generation: directly into extractor system. Maximum machining speed: 69 m/s.	Dust collection: in sealed plastic bags. Dust filters: "open".
	Suction hose length: 5 m. Suction hose diameter: 50 mm.

**Test results**

Table 4 and Figure 2 summarize the test results.

Situation	RCS concentration (mg/m <sup>3</sup> )
OEL, eight-hour time-weighted average	0.075
Permanent operation	0.042
"Heavy" use	0.021
"Light" use	0.005
Outdoor use	-
Practical use	-

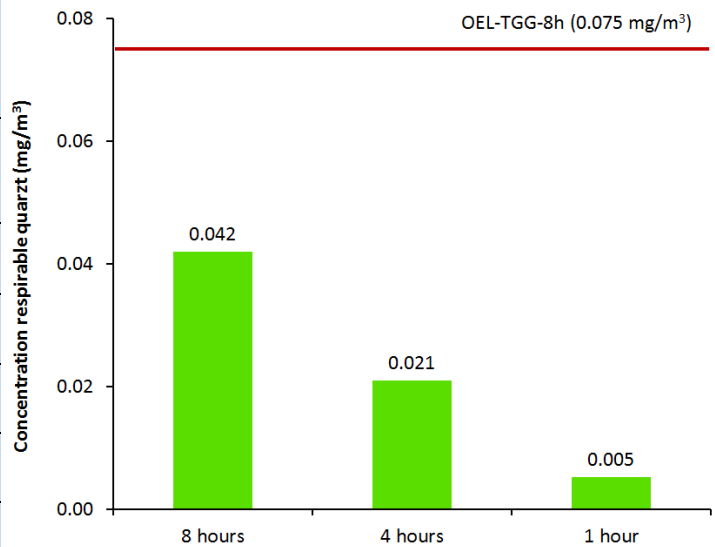


Figure 2. Exposure to RCS at OEL.

Table 4. Summary of measured data (calcium silicate).

## Conclusion

TNO measured exposure to respirable crystalline silica (RCS) in the “employee inhalation zone” when grinding calcium silicate using a 125 mm angle grinder fitted with a TNO/Dusttool dust shroud and connected to a Husqvarna S26 dust extractor.

In permanent operation (an entire eight-hour working day), average exposure was 0.042 mg/m<sup>3</sup>. This is below the statutory occupational exposure limit (OEL) of 0.075 mg/m<sup>3</sup> (eight-hour time-weighted average), meaning that the system tested does comply with the applicable standard for exposure to RCS in this situation.

As well as “permanent operation” TNO has also defined two more realistic reference situations.

- Heavy use: four hours of operation per eight-hour working day.
- Light use: one hour of operation per eight-hour working day.

In both of these situations, too, the system complied with the norm.

TNO assumes that the mass fraction of RCS in calcium silicate is 25 per cent. For concrete and brick, that figure is 15 per cent. This means that the tested system can be used to work on those materials for longer than with calcium silicate. When grinding concrete or brick, exposure remains within the statutory OEL in all the situations described above.

The labels below present the system’s performance in graphic form. The round label shows the total “responsible operating time” in hours per eight-hour working day. The rectangular label provides more detailed information for the situations tested, with the green bars indicating what proportion of each type of use during an eight-hour working day remains within the OEL.


**Label for calcium silicate grinding**

Reference: permanent operation.



- No measures
- 100% duration of operation (8 hrs per 8hr working day)
- Heavy use (4 hrs per 8hr working day\*)
- Light use (1 hrs per 8hr working day\*)

\* Given proportional operation during an 8-hour working day

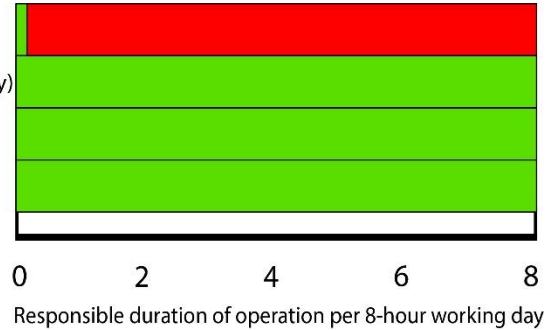


**Label for concrete grinding**

Reference: permanent operation.




- No measures
- 100% duration of operation (8 hrs per 8hr working day)
- Heavy use (4 hrs per 8hr working day\*)
- Light use (1 hrs per 8hr working day\*)

\* Given proportional operation during an 8-hour working day

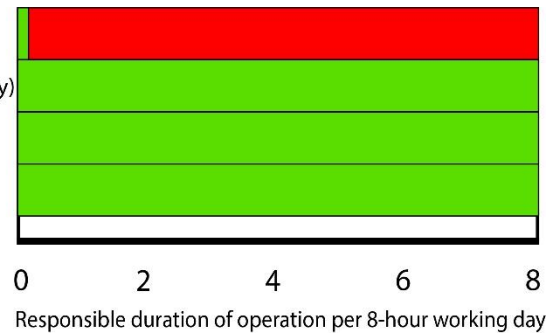

**Dust extractor with 5-metre suction hose (diameter 50 mm), without dust collection bag**

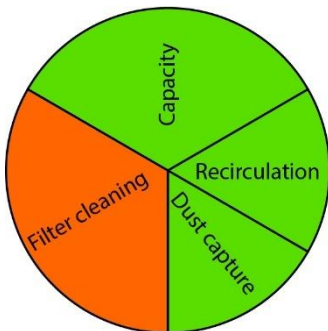

- Capacity (operational)**
- 150 - 200 m<sup>3</sup>/hour
  - 100 - 150 m<sup>3</sup>/hour
  - < 100 m<sup>3</sup>/hour

- Filter cleaning**
- Automatic cleaning (mechanic/air pulse) or filter replacement
  - Manual
  - None

- Recirculation dust extractor**
- H-classification according to IEC-norm 60335-2-69
  - M-classification according to IEC-norm 60335-2-69
  - L-classification according to IEC-norm 60335-2-69

- Dust capture**
- Closed system (dust bag)
  - Open system (dust bag)

NB. This test says nothing about the long-term use of dust extractors.