

Research summary

Performance test

Report number: TNO-2013-R10778

Van Mourik Broekmanweg 6
Postbus 49
2600 AA Delft

STOFVRIJWERKEN.TNO.NL

F 088 86 63023

T 088 86 63410

*TNO's quality system has
been certified in accordance
with ISO 9001.*

PULLMAN-ERMATOR S13 DUST EXTRACTOR IN COMBINATION WITH 180 MM CONCRETE GRINDING MACHINE AND HOLER DUST SHROUD

Client:

PULLMAN-ERMATOR AB
Industrivägen 10
SE-77791 Smedjebacken
SWEDEN

All rights reserved.
No part of this publication may be
reproduced and/or published by print,
photoprint, microfilm or any other
means without the previous written
consent of TNO.

In case this report was drafted on
instructions, the rights and obligations
of contracting parties are subject to
either the General Terms and
Conditions for commissions to TNO, or
the relevant agreement concluded
between the contracting parties.
Submitting the report for inspection to
parties who have a direct interest is
permitted.

In recent years TNO has focused closely on innovations in tools, processes and workplace designs in industrial work environments. The primary objective has been to realise production processes and means of production that create minimal dust levels. In addition to the building industry, the metal industry, the aircraft industry and the wood industry are all focal points for product/process development. This work involves collaboration with employers' organisations, trade unions, government, employers, employees and manufacturers/producers. As an instrument for assessing a process or tool's functionality during professional use, TNO has developed the TNO Performance Test. This describes innovative production processes and means of production. When these processes/tools are being used, the relevant public/private Occupational Exposure Limits for harmful substances (such as quartz dust, wood dust (hardwood), hexavalent chromium) in the employees' breathing zone, in normal daily use, are not exceeded.

The Inspectorate SZW has included the TNO Performance Test explicitly in one of its internal instructions. Translated quote: "If you decide to carry out the work while applying the measures as they are stated in a TNO Performance Test as stated on TNO's website (stofvrijwerken.tno.nl) then I regard the exposure as being adequately controlled."

For employers, this means that they can communicate unequivocally with the inspectors of The Inspectorate SZW and no additional exposure measurements need be submitted. Both employers and employees gain an objective assessment instrument that can assist them in reaching the right conclusion when next they make an investment decision. For innovative producers/suppliers of production processes and means of production (tools), this provides an opportunity to distinguish themselves from their competitors on the basis of quality.

Test criteria

The exposure to harmful substances in the employee's breathing zone in the workplace is tested. The following standard is applied:

- exposure to the relevant substance: public/private Occupational Exposure Limit (OEL) (see the SER website: <http://www.ser.nl/nl/taken/adviserende/grenswaarden.aspx> and in English http://www.ser.nl/en/oel_database/about_oels.aspx)

Project description for TNO Performance Test

TNO has carried out research into the emission of respirable quartz during the grinding of concrete using a concrete grinding machine equipped with a Holer dust shroud, connected to a Pullman-Ermator S13 dust extractor.

Specifications of Pullman-Ermator tool system

The tested system consists of a Pullman-Ermator S13 dust extractor (or equivalent*), connected to a 180 mm concrete grinding machine equipped with a Holer MPTX-HOL-GDG180PM dust shroud. The dust shroud is connected to the dust extractor by a flexible hose (5.0 metre, diameter 50 mm). The complete system is shown in Figure 1.

* Dust extractors are considered equivalent when their specifications are similar or superior to those of the type tested. The capacity, dust capture, filter cleaning and recirculation are the relevant criteria.



Pullman-Ermator S13 dust extractor with suction hose 5 metres in length, Ø 50 mm L-GDG180PM dust shroud



180 mm concrete grinding machine Holer MPTX-HOL-GDG180PM dust shroud

Figure 1. The complete tool system and dust extraction system

Table 1 shows the specifications of the Pullman-Ermator S13 dust extractor (or equivalent).

Table 1. Technical specifications Pullman-Ermator S13 dust extractor or equivalent

Characteristics	S13	S1300H	S1400LTD
Power consumption [W]	1.260	1.260	1.400
voltage [V]	230 (AC 50/60 Hz)	230 (AC 50/60 Hz)	230 (AC 50/60 Hz)
Maximum volume flow [m ³ /hr]	210	210	235
Filter efficiency [%]	99,995 (H14)	99,995 (H14)	99,995 (H14)
Underpressure [kPa]	22	22	24
Weight [kg]	29	27	43

AW

TNO Performance Test


The most important test conditions are shown in Table 2.

Table 2. Test conditions “Worst Case”

Type of material: concrete kerb Percentage respirable quartz in concrete: 15%	Partitioning of suction system: complete
Source strenght: continuous grinding Production: 100% duration of operation Employee exposure time: 8-hour work day	Suction capacity of dust extractor with hose: 120 m ³ /hr (start measurement) to 70 m ³ /hr (end measurement)
Cup wheel diameter: 180 mm Rated revolution grinding machine: 6,600 rpm	Filter efficiency: 99.995% (H14) Cleaning system dust extractor: manually every 15 minutes
Direction of dust dissemination: perpendicular to suction	Dust capture in enclosed, plastic dust bag Dust filters “open”
Speed of machining: maximum 63 m/s	Length of suction hose: 5 m Diameter suction hose: 50 mm

Test results

Situation	Concentration respirable quartz dust in mg/m ³
Occupational Exposure Limit (OEL) TGG-8h	0,075
100% duration of operation	0,175 0,160 0,175
“Heavy use”	0,085
“Light use”	0,021
Outdoors	-
Professional use	-

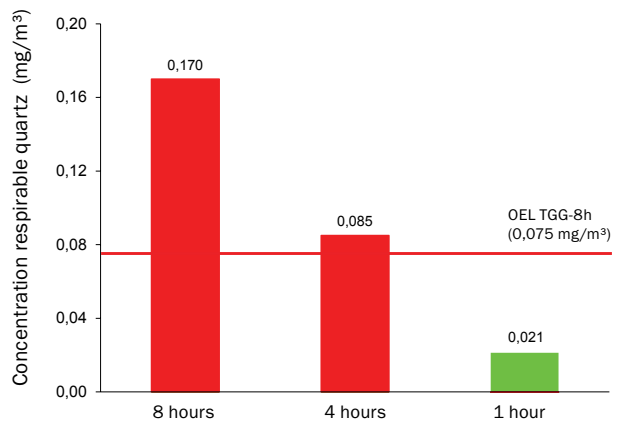

Test results for exposure respirable quartz relative to the OEL

AW

Conclusion

TNO has measured the following: the exposure to respirable quartz in the breathing zone when using the Pullman-Ermator S13 dust extractor while grinding concrete with a 180 mm concrete grinding machine equipped with a Holer MPTX-HOL-GDG180PM dust shroud.

For a duration of operation of 100% (8 hours of use per 8-hour work day) the exposure to respirable quartz in the employee’s breathing zone averages 0.170 mg/m³. This value is higher than the statutory threshold limit value of 0.075 mg/m³ (OEL TGG-8h) and, in view of this, when used in this situation, the tool system does not comply with the prevailing standard for exposure to respirable quartz.

In addition to “100% duration of operation”, TNO defines the following references with regard to professional use:

- heavy use: 4 hours grinding per 8-hour work day
- light use: 1 hour grinding per 8-hour work day

Similarly, in the situation “heavy use”, the threshold limit value is exceeded. By contrast, the total system does comply with the standard in the situation “light use”.

TNO applies a mass fraction of 15% for respirable quartz in concrete and brick. For calcarenite 25% is applied. This means that the period during which the tested tool system may be used to grind calcarenite is shorter than for concrete and brick. Only when the grinding of calcarenite falls into the category “light use”, does the exposure remain under the statutory threshold limit value.

The tables below show how the total system performed in various tests. The round label shows the responsible duration of operation in hours per 8-hour work day. The rectangular label specifies the various professional situations in more detail. Green indicates a use that does not exceed the relevant threshold limit value throughout an 8-hour work day.


Label for grinding calcium silicate blocks

Reference: 100% duration of operation (8 hours grinding /day)



- No measures
- 100% duration of operation (8 hrs grinding/8 hrs)
- Heavy use (4 hrs grinding/8 hrs*)
- Light use (1 hrs grinding/8 hrs*)

* given proportional operation during an 8 hour work day

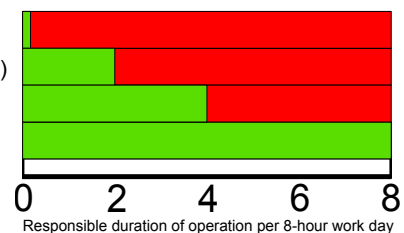

AO

Label for grinding concrete/brick

Reference: 100% duration of operation (8 hours grinding/day)




- No measures
- 100% duration of operation (8 hrs grinding/8 hrs)
- Heavy use (4 hrs grinding/8 hrs*)
- Light use (1 hrs grinding/8 hrs*)

* given proportional operation during an 8 hour work day



Label dust extractor combined with concrete grinding machine with Holer dust shroud

5 metre suction hose (Ø 50 mm) with closed, plastic dust bad



- Capacity (operational)
- 150 - 200 m³/hour
 - 100 - 150 m³/hour
 - < 100 m³/hour

- Filter cleaning
- Automatic cleaning (mechanic/air pulse) or filter replacement
 - Manual
 - None

- Recirculation air dust extractor
- H-classification according to IEC-norm 60335-2-69
 - M-classification according to IEC-norm 60335-2-69
 - L-classification according to IEC-norm 60335-2-69

- Dust capture
- Closed system (dust bag)
 - Open system (dust container)

N.B. This test involves no decision regarding the prolonged use of dust extractors.